

Excel in Your Field™

Specifications

CATEGORY	XG3135	XG3135H	XG3140	XG3140H
ENGINE				
Type	4-Stroke, Vertical, Water-Cooling			
Model(Tier4)	L3C19-T			
Engine HP(Gross)	35		40	
PTO HP	30.1	28.0	34.4	32.0
Rated speed, RPM	2,600			
Displacement-cu, in³.	114.7			
Fuel tank capacity(gal)	7.4			
Alternator(V-A)	12V - 70 Amps			
DRIVE TRAIN				
Transmission	Synchro Shuttle	HST	Synchro Shuttle	HST
No. of Speed	F12 x R12	3 Ranges	F12 x R12	3 Ranges
Brakes	Wet, Multi - disc			
Steering	Hydrostatic Power Steering			
PTO				
Type	Independent			
Rear(rpm)	Standard (540 rpm)			
HYDRAULIC SYSTEM				
Control system	Position			
Implement pump, gpm	8.2			
Steering pump, gpm	4.1	5.5	4.1	5.5
Total flow, gpm	12.3	13.7	12.3	13.7
Category, 3pt hitch	CAT I			
Hitch Lift capacity, lbs(Hitch end)	1,808			
Remote valves	Option			
DIMENSION				
Overall length, Frame to link, in.	121			
Overall width with tires, in.	54			
Wheelbase, in.	69			
Ht to top of rops, in.	88			
TIRE SIZE				
Ag Front / Rear	7 - 14 / 11.2 - 24			
IND Front / Rear	25 x 8.5 - 14 / 43 x16 - 20			
Turf Front / Rear	25 x 8.5 - 14 / 41 x14 - 20			
WEIGHT				
Total weight without ballast, lbs.	2,881	2,884	2,881	2,884

Note Specifications and design are subject to change without prior notice.

Get More Standard Features

- Power steering
 - Switch operated Independent rear PTO
 - ROPS with seat belt
 - Hydraulic position control
 - Differential lock
 - Draw bar
 - Pre-heat starting aid
- Safety flashers
 - Fuel, coolant temperature, tachometer & hour meter gauges
 - Pre-heating, parking brake, battery charging, engine oil pressure, fuel filter, PTO operation and high beam operation/warning lights



LS Tractor USA | 6900 Corporation Parkway, Battleboro, NC
P: 252.984.0700 | F: 252.984.0701 | www.lstractorusa.com



(956) 318-1370 • (956) 605-0051

info@rockinmoose.com

3901 W. Hwy 107 - McAllen, TX

000952-1605



XG3100 Series

XG3135 / XG3135H / XG3140 / XG3140H
Value Compacts




Excel in Your Field™

- 35HP & 40HP, 3 cylinder fuel efficient engine
- 5 year warranty*
- 12x12 synchro shuttle or 3 range HST with cruise control
- Front wheel mechanical assist 4WD
- Flat operator platform
- Choice of industrial, ag or turf tires at no additional cost
- Available quick attach front end loader with skid steer compatible bucket & grill guard
- Available sub-frame mounted, quick attach 6' backhoe

*5-year limited warranty. See dealer for details

XG3100 Series Value Compacts

Excel in Your Field™

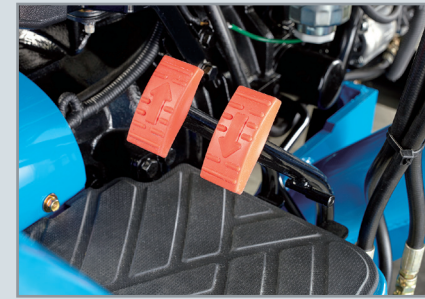

Hydrostatic transmission models

Maximizes ease of use with effortless, clutchless and instant speed and directional changes with a simple push of the pedal



SKC bucket, front loader with skid steer compatible bucket

Easy to take off or attach loader and easily change loader attachments. With up to 2,088 lbs of lift capacity, it outperforms others in its class. Grill guard comes standard with loader rather than an option



Your choice of tires

Choose ag, industrial or turf tires at no additional cost



New LS Tier 4 CRDI Engine

Meets EPA's most stringent emission standards while delivering rated horsepower quietly with low vibration



Full function dash panel

Important functional data is available at glance for optimum performance and control



Easy open one-piece hood

Provides accessibility for easy maintenance



Tilt steering wheel

Convenient lever allows you to adjust the tilt for maximum comfort



PTO On/Off switch

Best easy and safety Independent PTO control with electric on/off switch. User friendly design and location for simple PTO operation.



Adjustable seat

Offers comfort even during long operations