

Excel in Your Field™

Specification

CATEGORY	XJ2025	XJ2025H
ENGINE		
Type	3 - Cylinder, Indirect - injection, Water - cooled	
Model(Tier 4)	Mitsubishi S3L2	
Engine HP(gross)	24.4	
PTO HP	19.5	18.5
Rated speed(rpm)	2,500	
Displacement-cu(in³)	80.4	
Fuel tank capacity(gal)	6.6	
Alternator(V-A)	12V - 50 Amps	
DRIVE TRAIN		
Transmission	Sliding Shift	Hydrostatic Drive
No. of Speed	6F x 2R	2 Ranges
Brakes	Wet, Multi - disc	
Steering	Hydrostatic Power Steering	
PTO		
Type	Electro Hydraulic Clutch PTO	Independent
Rear(rpm)	Standard (540 rpm)	
Mid(rpm)	Standard (2000 rpm)	
HYDRAULIC SYSTEM		
Implement pump(gpm)	6.9	5.9
Steering pump(gpm)	1.1	2.6
Total flow(gpm)	8.0	8.5
Category(3pt hitch)	CAT 1	
Hitch Lift capacity, lbs(Hitch end)	1,433	
Lift control type	Position	
DIMENSION		
Overall length(Bumper to link in)	103	
Overall width with tires(in)	44.9	
Wheelbase(in)	59	
Ht to top of rops(in)	92.3	
TIRE SIZE		
IND Front / Rear	23 x 8.5 - 12 / 33 x 12 - 16.5	
Turf Front / Rear	23 x 8.5 - 12 / 33 x 12.5 - 16.5	
WEIGHT		
Total weight without ballast(lbs)	1,785	1,609

Note Specifications and design are subject to change without prior notice.

Get More Standard Feature

- Power steering
 - Switch operated Independent PTO, rear & mid (XJ2025H)
 - Lever selector for rear PTO, mid PTO or both (XJ2025)
 - Foldable ROPS
 - Rear work light
 - Hydraulic position control
 - Differential lock
- Draw bar
 - Pre-heat starting aid
 - Safety flashers & turn signals
 - Fuel, coolant temperature, tachometer & hour meter gauges
 - Pre-heating, parking brake, battery charging, engine oil pressure, PTO operation and high beam operation/warning lights



LS Tractor USA | 6900 Corporation Parkway, Battleboro, NC
P: 252.984.0700 | F: 252.984.0701 | www.lstractorusa.com

Front End Loader	LL2101
Tractor Application	XJ 2000 Series
Maximum Lift height(in)	85.7
Clearance with Attachment Dump(in)	65
Reach at Maximum Height(in)	22
Maximum Dump Angle(deg)	52
Maximum Rollback Angle(deg)	43
Digging Depth(in).	4.4
Overall Height in Carry Position(in)	42.8
Lift Capacity(@ Pivot pin)(lbs)	1,277
Breakout Force(@ Pivot pin)(lbs)	1,643
Approx. Weight (Loader w/o Bucket)(lbs)	638

Backhoe	LB1104
Tractor Application	XJ 2000 Series
Digging Depth(in)	79.3
Reach from centerline of swing Pivot(in)	113.3
Loading Height(in)	56.9
Swing Arc(deg)	150
Transport Height(in)	75.2
Bucket Rotating(deg)	163
Stabilizer Spread(Down position)(in)	87.7
Stabilizer Spread(Up position)(in)	55.7
Bucket Digging force(lbs)	2,096

Mid-mount Mower	LM3560
Tractor Application	XJ 2000 Series
Cutting Width(in)	60
Overall Width(in)	74
Cutting Height Range(in)	1 to 4-1/8
Deck shell Thickness(in)	10-Gauge (0.1345 in.) Grade 50 steel
Spindle Speed at 2000 RPM	2,842 RPM
Blade Tip Speed(ft./min)	18,000
Number of Blades	3
Blade Length(in)	21
Blade Width(in)	2-1/2
Blade Thickness(in)	1/4
Shipping Weight of Base 60" Deck(lbs)	450

Snow Blower	LS3150
Tractor Application	XJ 2000 Series
Overall width(in)	50
Cutting width(in)	49 3/4
Cutting height(in)	20
Impeller drive	Chain #40
Auger drive	Worm gear
Auger diameter(in)	12 3/4
Impeller diameter(in)	15 3/4
Number of blades on impeller	3
Chute rotation	Manual
Adjustable heavy skid shoes	Yes



(956) 318-1370 • (956) 605-0051

info@rockinmoose.com

3901 W. Hwy 107 - McAllen, TX

39000930-1411



XJ Series

XJ2025 / XJ2025H

Small Compact



Excel in Your Field™

- Eco-friendly Tier 4, 24.4HP, 3 cylinder fuel efficient engine
- 5 year warranty*
- 6F x 2R sliding gear shift or 2 range HST with dual pedals and cruise control
- Front wheel mechanical assist 4WD
- Choice of industrial or turf tires at no additional cost
- Available quick attach front end loader and grille guard
- Available sub-frame mounted, quick attach 6' backhoe
- Available 60" mid-mount mower
- Available 50" snow blower

*5-year limited warranty. See dealer for details

XJ Series Small Compact

Excel in Your Field™



Hydrostatic Transmission Models
Maximizes ease of use with effortless, clutch-less and instant speed and directional changes with a simple push of the pedals



Standard MID PTO
2000 RPM Mid PTO for optional height adjustable 60" mid-mount mower that provides a smooth and beautiful cut



Easy to control PTO Switch
Turn the rear or mid PTO on or off with the simple and easy turn of a switch



Modern Stylish Design



Tier 4 engine(Mitsubishi)
Eco-friendly, fuel efficient engine delivers quiet, reliable performance. Rubber engine mounts reduce operator platform vibration




High efficient 3-point hitch
Improves your working speed and safety with quick reponse and maximized lift capacity of 3-point hitch



Ergonomically designed control system
Easily accessible for maximum comfort and convenience



Better visibility of dashboard
More visible cluster design to keep you in better control of your tractor

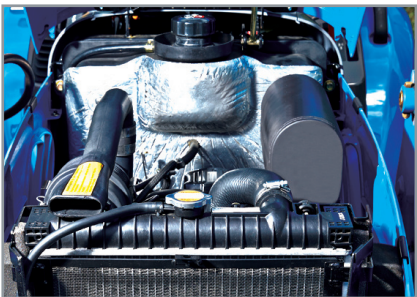

Large fuel tank
6.6 gal. capacity provides long operation time



Better seat cushion with retractable seatbelt
Keeps you in a comfortable and safe position for maximum control